



RINOA

36 W Pendant LED Lighting Luminaire

Order Code : 3092686
 Product Code : RNA 036S 40OD00 LLL 600



Product Data


Standard Features

Housing	: RAL 9005 Powder finished 0,60mm sheet steel housing
Diffuser	: Opal Diffuser
IP Grade	: IP20
Installation	: Pendant
Light Source	: Mid Power LED

Optical & Electrical Features

Power Consumption	: 36.1 W
Final Luminous Flux	: 3462.9 lm
Efficacy	: 95.9 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 700 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Photometric Curve

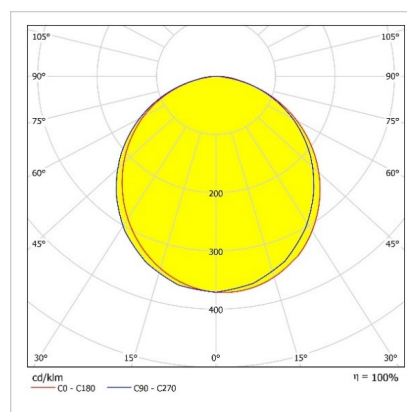

Other Features & Conditions

Operating Temperature Range	: -20 °C/+35 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 72.000 hours @Ta= 35 °C


Optional Features

Correlated Color Temperatures	: 3000K, 6500K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes
Color Options	: RAL 9005

RINOA

36 W Pendant LED Lighting Luminaire

3092686 RNA 036S 40OD00 LLL 600

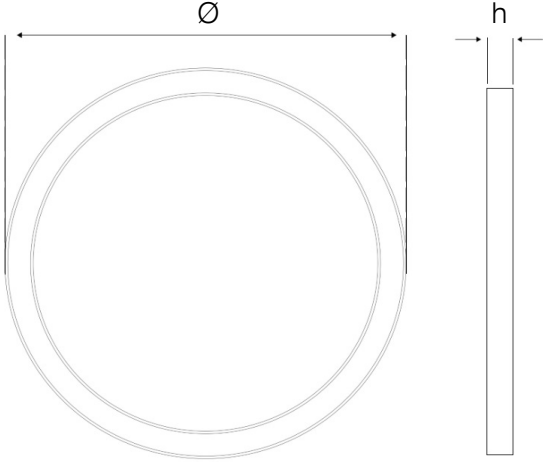

Dimensions (mm)

	\varnothing	h
Standard	600	98



- EAE Aydınlatma reserves the right to make any change without prior notice.



Revision date: 17.02.2020