



PB2 PB v.2

64 W Urban LED Lighting Luminaire

Order Code : 3179699
 Product Code : PB2 064U 40FS00 3A 7K10PB V2



Product Data

Standard Features

Housing	: Aluminium injection housing
Diffuser	: Opal diffuser
IP Grade	: IP65
Installation	: Pole mounted
Light Source	: Power LED


Optical & Electrical Features

Power Consumption	: 63.8 W
Final Luminous Flux	: 7145.3 lm
Efficacy	: 111.9 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 6 kV
Drive Current	: 700 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >70

Other Features & Conditions

Operating Temperature Range	: -20 °C/+45 °C
Impact Resistance	: IK08
Led Life Time - L70	: > 54.000 hours @Ta= 45 °C

Photometric Curve

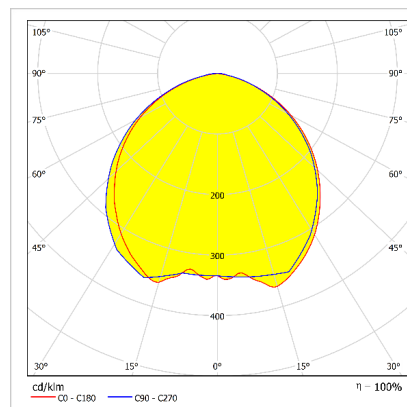


Optional Features

Correlated Color Temperatures	: 5700K
Electronic Control	: Dali

PB2 PB V.2

64 W Urban LED Lighting Luminaire

3179699 PB2 064U 40FS00 3A 7K10PB V2

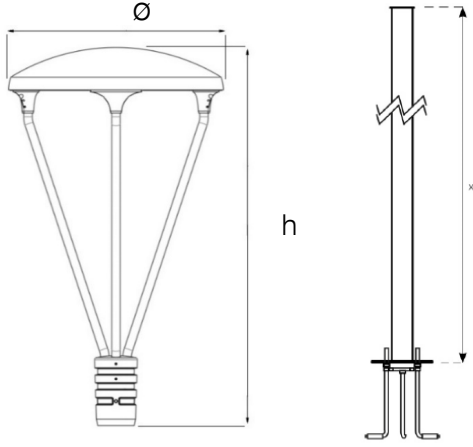

Dimension (mm)

	Ø	h	x
Standard	500	893	3000x4000

Weight (kg)

Standard	10,8
----------	------



Pole Order Table

Order Code	Descriptions	Product Codes
1019004	PB2 PB CAP76 3 MT	CMN PB CAP76 3M DIREK
1019006	PB2 PB CAP76 4 MT	CMN PB CAP76 4M DIREK

- EAE, reserves the right to make changes without prior notice.



Revision date: 27.07.2020