



DOWNLED PC V.2

Recessed Mounted 20 W Spot Led
Lighting Luminaire

Order Code : 3182221
Product Code : DWL_020A_40PC00_2K2_08_20_V.2



Product Data

Standard Features

Housing	: RAL 9016 Painted aluminium injection housing
Diffuser	: Recessed opal diffuser
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: Mid Power LED


Optical & Electrical Features

Power Consumption	: 19.4 W
Final Luminous Flux	: 2240.4 lm
Efficacy	: 114.9 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 600 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions

Operating Temperature Range	: -20 °C/+40 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 72.000 hours @Ta= 40 °C

Photometric Curve

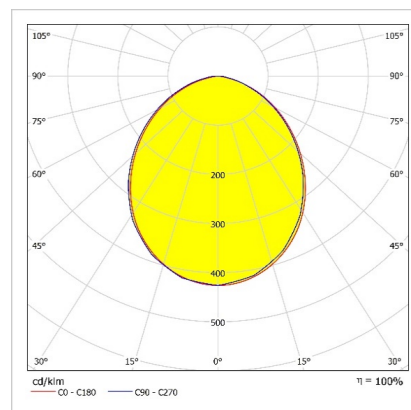


Optional Features

Correlated Color Temperatures	: 3000K, 5700K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes
IP Grade	: IP65
Color Option	: RAL 9005, 9010

DOWNLED PC V.2


Recessed Mounted 20 W Spot Led Lighting Luminaire

3182221 DWL 020A 40PC00 2K2 08 20 V.2



Dimensions (mm)

	Ø	h	Ø D
Recessed mounted	225	91	200



Weight (kg)

Standard	1
With Emergency Kit (1 hr.)	1,5
With Emergency Kit (3 hrs.)	2

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 14.04.2021