



GALIS

Surface Mounted 37 W Etanj LED Lighting Luminaire

Order Code : 3122605
 Product Code : GLS 037U 40CM00 4K3 125 PG V.B



Product Data

Standard Features

Housing	: Aluminium extrusion housing
Diffuser	: Transparent glass
IP Grade	: IP66
Installation	: Surface mounted
Light Source	: Mid Power LED


Optical & Electrical Features

Power Consumption	: 37 W
Final Luminous Flux	: 4376.9 lm
Efficacy	: 118.3 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 900 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions

Operating Temperature Range	: -25 °C/+40 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK07
Led Life Time - L70	: > 72.000 hours @Ta= 40 °C

Photometric Curve

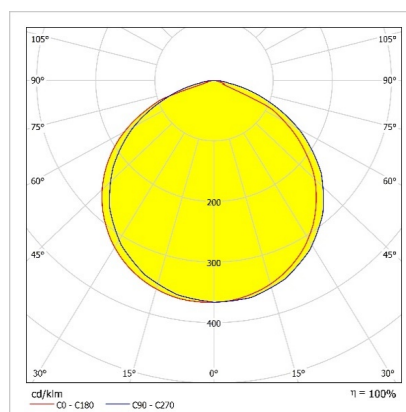


Optional Features

Correlated Color Temperatures	: 3000K, 6500K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes

GALIS

Surface Mounted 37 W Etanj LED Lighting Luminaire

3122605 GLS 037U 40CM00 4K3 125 PG V.B

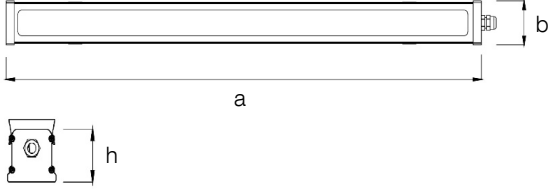


Dimension (mm)


	a	b	h	d
Standard	1246	76	70.5	15
With Emergency Kit (1 hr.)	1246	76	70.5	15
With Emergency Kit (3 hrs.)	1246	76	70.5	15

Weight (kg)


Standard	3,4
With Emergency Kit (1 hr.)	3,8
With Emergency Kit (3 hrs.)	4,3

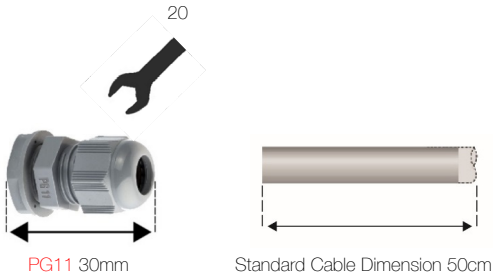

Suspension Set



Stainless steel suspension set

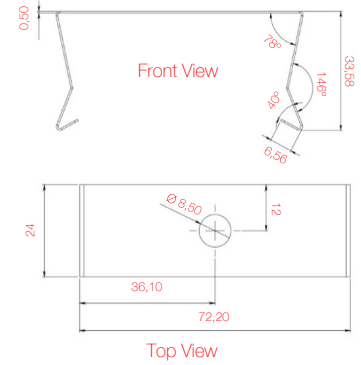

- EAE, reserves the right to make changes without prior notice.



Revision date: 20.08.2020