



GALIS

Sıva Üstü 69 W Etanj LED Aydınlatma Armatürü

Order Code : 3134061
Product Code : GLS 070U 40KC00 6K7 149 PG V.B



Product Data

Standard Features

Housing	: Aluminium extrusion housing
Diffuser	: Sanded glass
IP Grade	: IP66
Installation	: Surface mounted
Light Source	: Mid Power LED


Optical & Electrical Features

Power Consumption	: 69,1 W
Final Luminous Flux	: 6755.2 lm
Efficacy	: 97.7 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 475 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions

Operating Temperature Range	: -25 °C/+40 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK07
Led Life Time - L70	: > 72.000 hours @Ta= 40 °C

Photometric Curve

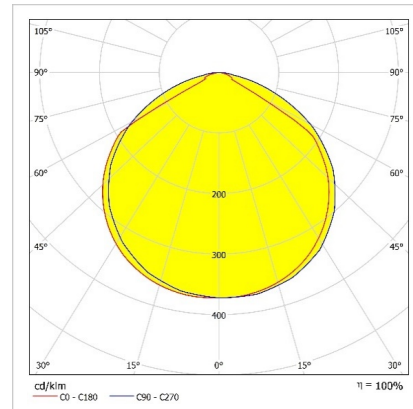


Optional Features

Correlated Color Temperatures	: 3000K, 6500K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes

GALIS

Sıva Üstü 69 W Etanj LED Aydınlatma Armatürü

3134061 GLS 070U 40KC00 6K7 149 PG V.B

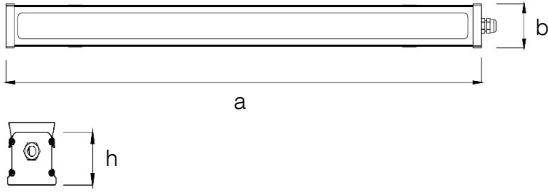

Dimension (mm)



	a	b	h	d
Standard	1489	76	70.5	15
With Emergency Kit (1 hr.)	1489	76	70.5	15
With Emergency Kit (3 hrs.)	1489	76	70.5	15

Weight (kg)

Standard	4,8
With Emergency Kit (1 hr.)	5,2
With Emergency Kit (3 hrs.)	5,7



Suspension Set

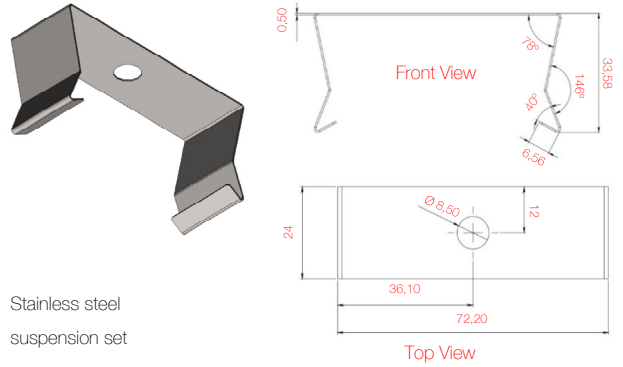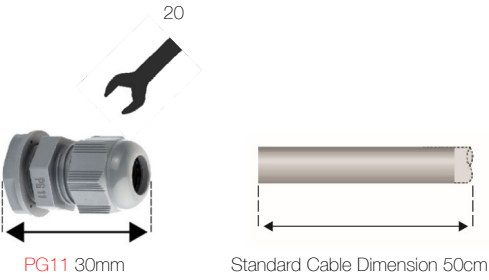

- EAE, reserves the right to make changes without prior notice.



Revision date: 20.08.2020