



# MODILED HB II V.2 LOWBAY

Pendant 40 W LED Lighting Luminaire

Order Code : 3132136  
Product Code : MHB 040S 40LB00 5K2 144I3 V.2



## Product Data

### Standard Features

Housing	: Aluminium extrusion housing and cover
Diffuser	: Glare controlled opal diffuser
Optic	: 96° lens
IP Grade	: IP20
Installation	: Pendant
Light Source	: Mid Power LED


### Optical & Electrical Features

Power Consumption	: 40.5 W
Final Luminous Flux	: 5278.1 lm
Efficacy	: 130.3 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 350 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

### Other Features & Conditions

Operating Temperature Range	: -20 °C/+40 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 60.000 hours @ Ta=40 °C

## Photometric Curve

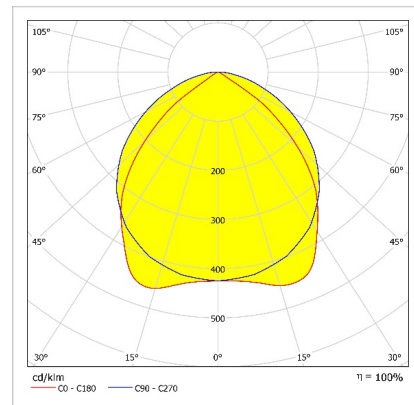


### Optional Features

Correlated Color Temperatures	: 3000K, 6500K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes

# MODILED HB II V.2 LOWBAY

Pendant 40 W LED Lighting Luminaire

3132136 MHB 040S 40LB00 5K2 144I3 V.2

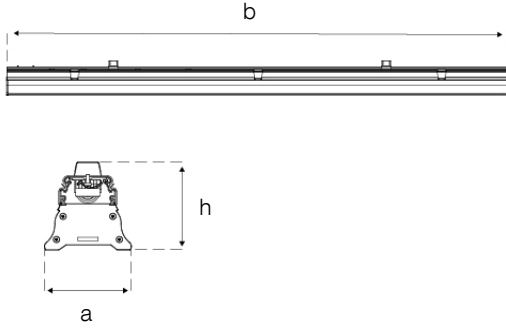

## Dimension (mm)


	a	b	h
Standard	102	1440	90

## Weight (kg)

Standard	4,5
With Emergency Kit (1 hr.)	5,3
With Emergency Kit (3 hrs.)	5,6



## Suspension Set

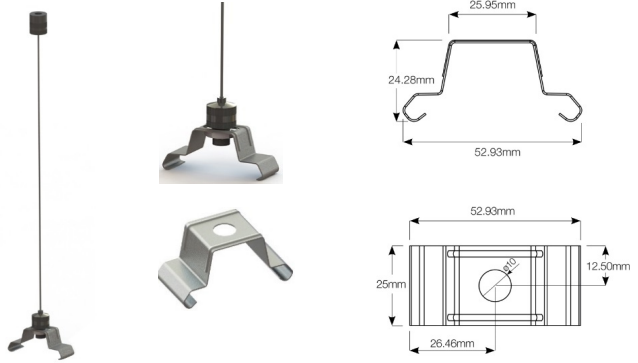

- EAE Aydınlatma reserves the right to make any change without prior notice.



Revizyon tarihi: 08.05.2018