



MODILED HB II V.2 LOWBAY

Pendant 53 W LED Lighting Luminaire

Order Code : 3132232
Product Code : MHB 053S 40LB00 6K7 144I3 V.2



Product Data

Standard Features

Housing	: Aluminium extrusion housing and cover
Diffuser	: Glare controlled opal diffuser
Optic	: 96° lens
IP Grade	: IP20
Installation	: Pendant
Light Source	: Mid Power LED


Optical & Electrical Features

Power Consumption	: 53.1 W
Final Luminous Flux	: 6565.6 lm
Efficacy	: 123.6 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 450 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions

Operating Temperature Range	: -20 °C/+40 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 60.000 hours @ Ta=40 °C

Photometric Curve

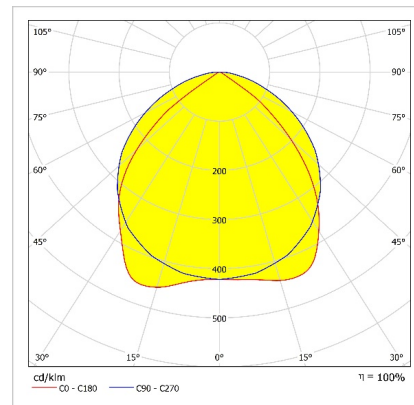


Optional Features

Correlated Color Temperatures	: 3000K, 6500K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes

MODILED HB II V.2 LOWBAY

Pendant 53 W LED Lighting Luminaire

3132232 MHB 053S 40LB00 6K7 144I3 V.2

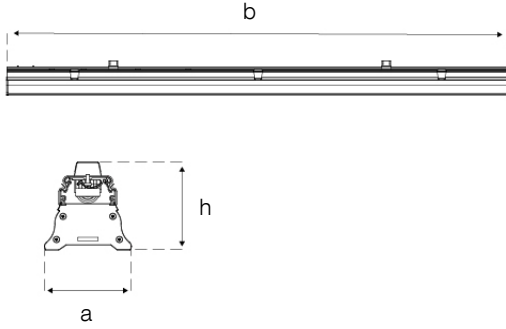


Dimension (mm)

	a	b	h
Standard	102	1440	90

Weight (kg)

Standard	4,5
With Emergency Kit (1 hr.)	5,3
With Emergency Kit (3 hrs.)	5,6

Suspension Set

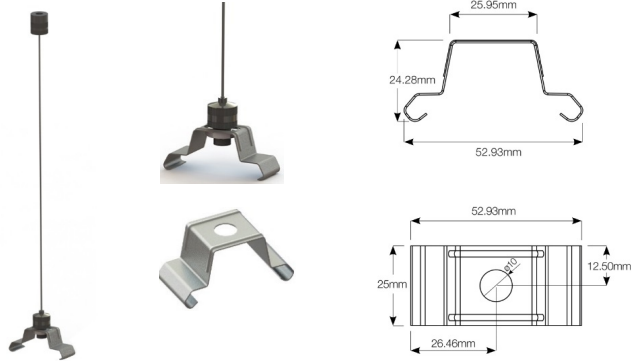

- EAE Aydınlatma reserves the right to make any change without prior notice.



Revizyon tarihi: 08.05.2018