



LOGY LOWBAY

95 W High Bay Logistic LED Lighting Luminaire

Order Code : 3133115
 Product Code : LOJ 095U 400A00 LB 12K4 90 306020



Product Data

Standard Features

Housing	: 0.80 mm DKP sheet steel housing
Optic	: 90° lens
IP Grade	: IP20
Installation	: Surface mounted
Light Source	: Mid Power LED


Optical & Electrical Features

Power Consumption	: 94.9 W
Final Luminous Flux	: 12469.5 lm
Efficacy	: 131.2 lm/w
Input Voltage	: 220-240 V
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 720 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions

Operating Temperature Range	: -25 °C/+35 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+30 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 72.000 hours @Ta= 35 °C

Photometric Curve

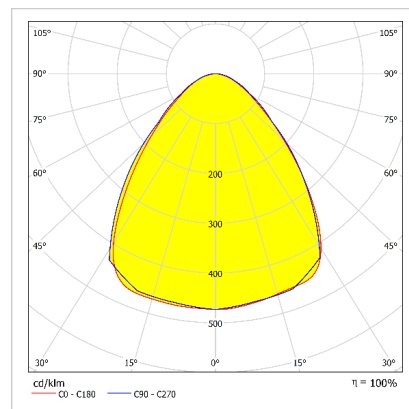


Optional Features

Correlated Color Temperatures	: 3000K, 5700K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes

LOGY LOWBAY


95 W High Bay Logistic LED Lighting Luminaire

3133115 LOJ 095U 400A00 LB 12K4 90 306020

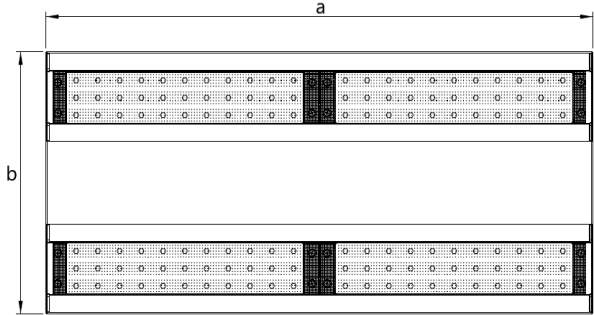

Dimension (mm)

	a	b	h
Standard	655	300	70
With Emergency Kit (1, 3 hrs.)	655	300	70
DALI	655	300	70

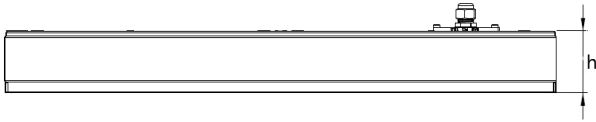


Weight (gr)

Standard	7
With Emergency Kit (1, 3 hrs.)	8




Suspension Set



Busbar Hanger Set

Product Code : 3080654


a	b	c	Weight (gr)
62mm	48mm	162mm	312



Cable Tray and Wall Hanger Set

Product Code : 3080655

a	b	c	Weight (gr)
62mm	48mm	70mm	191



Wall-Mounted Hanger Set

With 10° Angular Adjustment Steps

Product Code : 3080656

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başaşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 05.02.2020