



RA 2

54 W LED Lighting luminaire for street Lighting



Order Code : 3156640
 Product Code : RA2 054D 40SC00 100 6K73

Product Data


Standard Features

Housing	: SW 306G painted aluminium injection housing
Diffuser	: Tempered transparent glass
Optic	: 100° lens
IP Grade	: IP66
Installation	: Pole mounted
Light Source	: Power LED

Optical & Electrical Features

Power Consumption	: 53.9 W
Final Luminous Flux	: 6731.9 lm
Efficacy	: 124.7 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 6 kV
Drive Current	: 1000 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >70

Photometric Curve

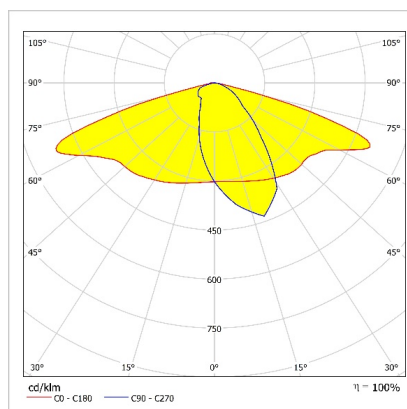


Other Features & Conditions

Operating Temperature Range	: -40 °C/ +60 °C
Impact Resistance	: IK08
Led Life Time - L70	: > 145.000 hours @Ta= 60 °C

Optional Features

Correlated Color Temperatures	: 5000K, 6500K
DALI	: Yes , RF Control

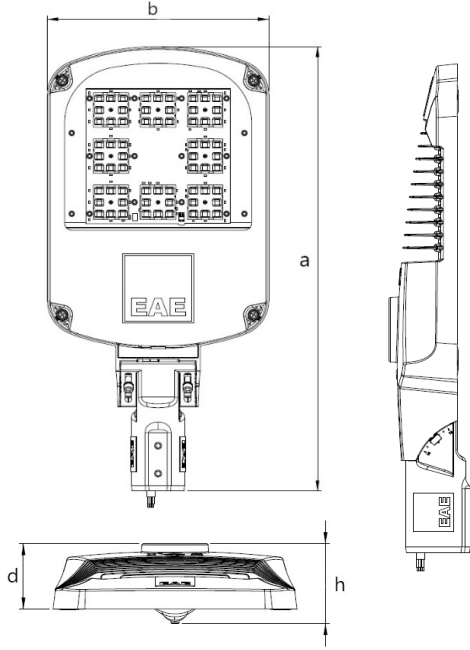

RA 2

54 W LED Lighting luminaire for street Lighting

3156640 RA2 054D 40SC00 100 6K73

Dimensions (mm)


	a	b	h	d
Standard	639	310	104	85

Weight (kg)

Standard	6,7
----------	-----



Vertical Installation Brackets

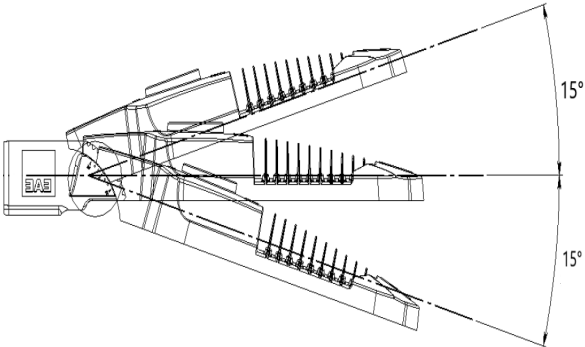

- EAE, reserves the right to make changes without prior notice.

