



## RA 2

53 W LED Lighting luminaire for street Lighting



Order Code : 3177995  
 Product Code : RA2 053D 40SC00 110 6K47

### Product Data

#### Standard Features

Housing	: SW 306G painted aluminium injection housing
Diffuser	: Tempered transparent glass
Optic	: 110° lens
IP Grade	: IP66
Installation	: Pole mounted
Light Source	: Power LED


#### Optical & Electrical Features

Power Consumption	: 53.2 W
Final Luminous Flux	: 6477.1 lm
Efficacy	: 121.5 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 6 kV
Drive Current	: 1000 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >70

#### Other Features & Conditions


Operating Temperature Range	: -40 °C/ +60 °C
Impact Resistance	: IK08
Led Life Time - L70	: > 145.000 hours @Ta= 60 °C

### Photometric Curve

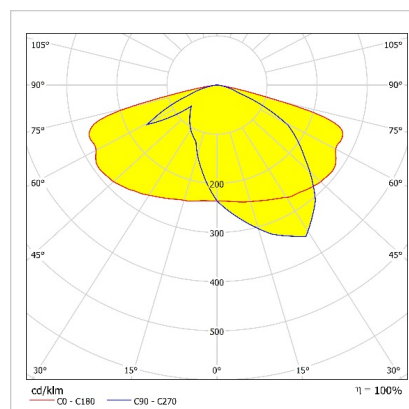

#### Optional Features

Correlated Color Temperatures	: 5000K, 6500K
DALI	: Yes , RF Control

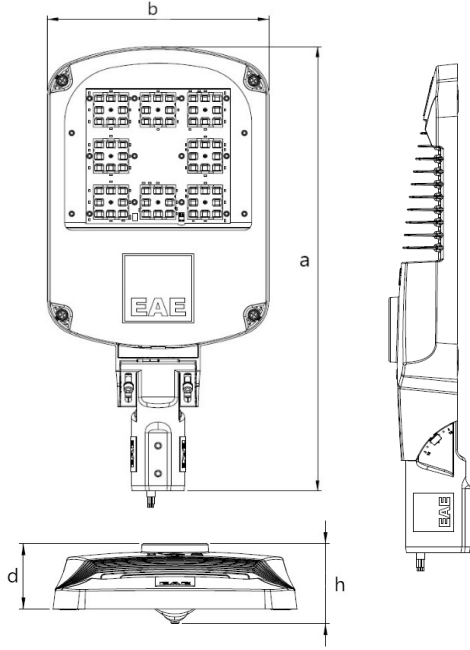

## RA 2

53 W LED Lighting luminaire for street Lighting

3177995 RA2 053D 40SC00 110 6K47

### Dimensions (mm)


	a	b	h	d
Standard	639	310	104	85

### Weight (kg)

Standard	6,7
----------	-----



### Vertical Installation Brackets

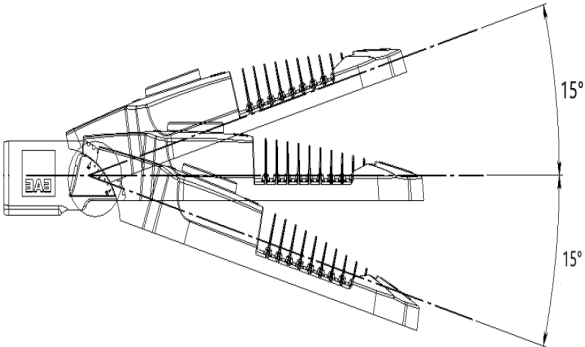

- EAE, reserves the right to make changes without prior notice.



**EAE Aydınlatma A.Ş.**

İktisadi Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
[www.eaeaydinlatma.com.tr](http://www.eaeaydinlatma.com.tr)

Revision date: 28.12.2020