



LINA ETANJ MINI V2

Surface Mounted 30 W Etanj LED Luminaire

Order Code : 3204830
 Product Code : LNE 030U 40D00 3K2 100 MR MN V.2



Product Data

Standard Features

Housing	: Aluminum extrusion housing
Diffuser	: Glare controlled opal diffuser
IP Grade	: IP64
Installation	: Surface mounted
Light Source	: Mid Power LED
Electronic Control	: On-Off

Optical & Electrical Features


Power Consumption	: 29 W
Final Luminous Flux	: 3199.4 lm
Efficacy	: 110.1 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 700 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80
Photobiological Risk Group	: RGO

* There is ± 10% Tolerance in Technical Values.

Other Features & Conditions

Operating Temperature Range	: -20 °C/+40 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK09
Led Life Time - L70	: 72.000 hours @Ta= 40 °C

Photometric Curve

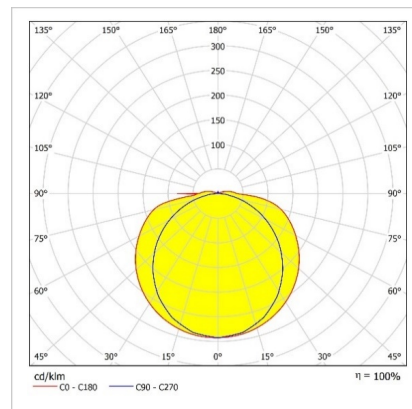


Optional Features

Correlated Color Temperatures	: 3000K, 5700K, 6500K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes

LINA ETANJ MINI V.2


Surface Mounted 30 W Etanj LED Luminaire

3204830 LNE 030U 400D00 3K2 100 MR MN V.2

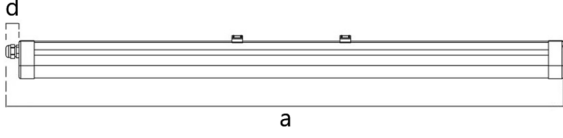


Dimension (mm)

	a	b	h	d
Standard	1023	47	70	15
With Emergency Kit (1 hr.)	1023	47	70	15
With Emergency Kit (3 hrs.)	1023	47	70	15



Weight (kg)


Standard	1,3
With Emergency Kit (1 hr.)	1,7
With Emergency Kit (3 hrs.)	2,2

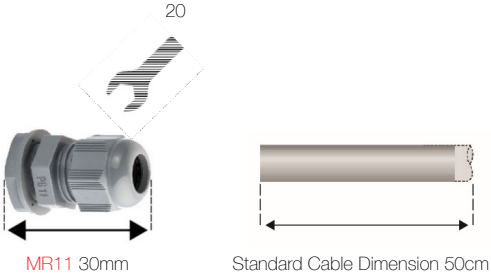

Suspension Set



Stainless steel
suspension set

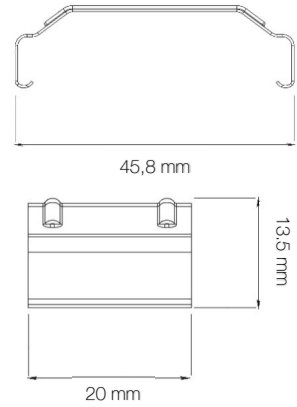

- EAE, reserves the right to make changes without prior notice.



Revision date: 03.02.2021