



LINA ETANJ MINI V2

Surface Mounted 14 W Etanj LED Luminaire

Order Code : 3204915
 Product Code : LNE 016U 400D00 1K4 053 MR MN V.2



Product Data

Standard Features

Housing	: Aluminum extrusion housing
Diffuser	: Glare controlled opal diffuser
IP Grade	: IP64
Installation	: Surface mounted
Light Source	: Mid Power LED
Electronic Control	: On-Off

Optical & Electrical Features


Power Consumption	: 14.4 W
Final Luminous Flux	: 1476.8 lm
Efficacy	: 102 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 500 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80
Photobiological Risk Group	: RGO

* There is ± 10% Tolerance in Technical Values.

Other Features & Conditions

Operating Temperature Range	: -20 °C/+40 °C
Impact Resistance	: IK09
Led Life Time - L70	: 72.000 hours @Ta= 40 °C

Photometric Curve

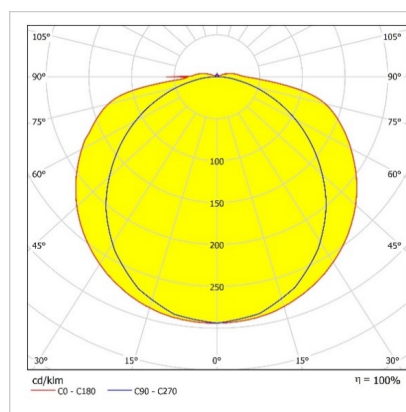



Optional Features

Correlated Color Temperatures	: 3000K, 5700K, 6500K
DALI Option	: Yes

LINA ETANJ MINI V.2

Surface Mounted 16 W Etanj LED Luminaire

3204915 LNE 016U 400D00 1K4 053 MR MN V.2

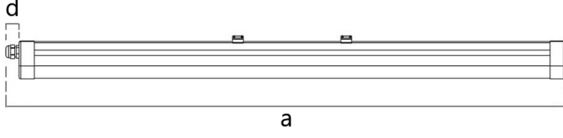

Dimension (mm)

	a	b	h	d
Standard	543	47	70	15

Weight (kg)

Standard	0,8
----------	-----



MR11 30mm




Standard Cable Dimension 50cm


Suspension Set



Stainless steel
suspension set



45,8 mm



13,5 mm

20 mm

- EAE, reserves the right to make changes without prior notice.



Revision date: 01.02.2021